


JK600 电动扣压机

JK600 Electric Crimper

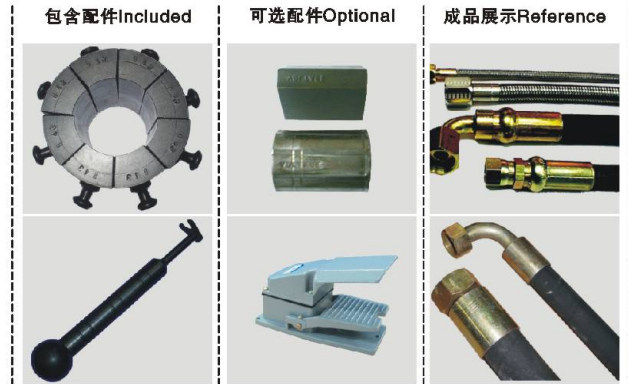

技术参数 TECHNICAL SPECIFICATIONS

扣压力 (kN) Crimping Force	6000/600吨(Ton)	胶管通径 (mm) Hose Internal Size	4 ~ 76	电机功率 (kW) Motor Power	7.5
标准电压 Standard Voltage	380V, 3相(3ph)	额定油压 (MPa) Oil Pressure	31.5	开口直径 (mm) Opening	+ 40
整机重量(kg) Weight Without Oil	750	配套模具 (sets) Dies	17		

长 (mm) Length	1000	宽 (mm) Width	540	高 (mm) Height	900
------------------	------	-----------------	-----	------------------	-----

特点 PERFORMANCE

- 自动操作或者脚踏式操作供选择
Automatic or Foot pedal opening and closing control
- 油缸新技术升级·模具仅做径向运动
Upgrade oil Cylinder·Radial movement of the dies
- 定位方便, 加工质量稳定·生产效率高
Easy loading with fine Performance·Efficiency
- 换上螺母缩口模具也可用做螺母缩口
Can be used as the nut crimping machine after changing the dies
- 扣压力大, 可达6000千牛, 换上专用模具可用于厚壁钢管整形
High crimping force up to 6000KN, available for reshaping of thick steel pipe

适应产品范围 APPLICABLE PRODUCT RANGE

胶管类型 Hose Type	最大胶管尺寸 Max.Hose Size
3层钢丝编织或纤维编织 3 wire braids or textile	3" (3英寸)
4层钢丝缠绕 4 wire spirals	3" (3英寸)
6层钢丝缠绕 6 wire spirals	2" (2英寸)

JK600型电动扣压机-----标准模具模号以及对应的扣压范围列表

JK600 Electric crimper-----Standard die sizes

模号 Die No.	14	16	19	24	28	32	36	40	45	51	59	65	70	76	82	90	98
扣压范围 Crimping Range (mm)	14-16	16-19	19-24	24-28	28-32	32-36	36-40	40-45	45-51	51-59	59-65	65-70	70-76	76-82	82-90	90-98	98-106
模具长度 L (mm)	45	45	60	60	60	60	75	75	80	80	90	90	105	105	105	110	110